




UNDER REVIEW
URF 19-1276 19.11.08 (VM)

269C™, S1809 and Subsequent
Handbook of Maintenance Instructions
CSP-C-10

SHOP COPY

RELEASED FOR PROD.
DATE: 05/21/14 INT: uk

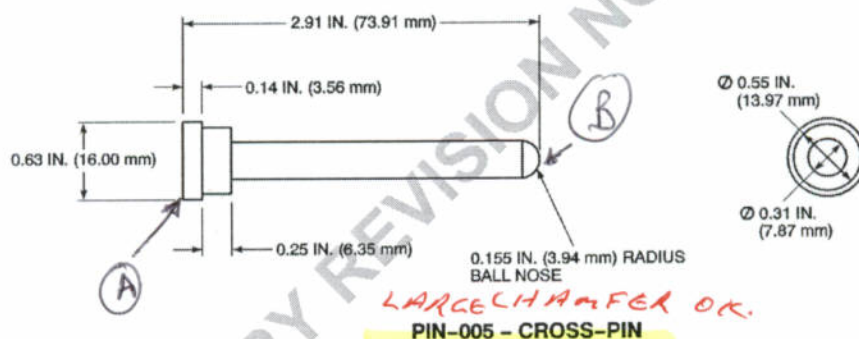

NOTES

1. MATERIAL: 4130 ROUND BAR STK, HEAT TREAT TO RC 48-52.
2. FINISH: BLACK OXIDE - COMMERCIAL GRADE.
3. ALL DIMENSIONS ± 0.01 IN. (0.25 mm) UNLESS OTHERWISE SPECIFIED.
4. DEBURR AND BREAK ALL SHARP EDGES.
5. QTY 2 PINS REQUIRED.

*2 PLS
DRILL BLANKS*

LH0118
SA

*MSC .311 DRILL BLANK #11.47
01237338 4 3/4 LG*

Figure 5-7. Landing Gear Load Stroke Inspection Apparatus Components (Sheet 4 of 6)